

## PU-FINISH MATTE

### One-component, low-viscosity, transparent, aliphatic polyurethane liquid membrane for satin finish.

#### DESCRIPTION

**PU-FINISH MATTE** is a one-component, low viscosity polyurethane fluid which cures with the humidity in the atmosphere to produce a transparent membrane with very strong adhesion on most types of substrate. It is aliphatic: No yellowing as a result of direct exposure to sunlight.

It is based on pure elastomeric hydrophobic polyurethane resin, which results in excellent mechanical, chemical, thermal, UV and natural element resistance properties.

Apply with brush in one or two coats. Minimum total consumption: 0.1-0.2 kg/m<sup>2</sup>.

#### RECOMMENDED FOR

- Provides very good impregnation of stone, porous marble & mosaics.
- Provides satin finish to **HYPERDESMO®-T** and other aliphatic top-coats.

#### LIMITATIONS

Not recommended for:

- Unsound substrates,
- application in thick coats,



Apply in very **thin** coats in order to avoid bubbling.

- pigmentation, its low viscosity reduces hiding power.

#### FEATURES & BENEFITS

- Satin result,
- excellent impregnation, even if substrate is only

slightly porous, e.g. marble, mosaic,

- quick curing – no dust pick-up,
- strong and uniform adhesion on almost any type of surface,
- excellent heat and ultraviolet/UV resistance, it will not yellow, peel or soften up to 80 °C, max shock temperature 200 °C,
- highly durable when exposed to cold, maintains its elasticity even down to -40 °C,
- highly resistant to mechanical stresses (high tensile strength and abrasion resistance),
- resistant to chemicals.

#### APPLICATION PROCEDURE

Clean the substrate using a high pressure washer, if possible. Remove oil, grease and wax contaminants. Cement laitance, loose particles, mould release agents, cured membranes must also be removed.

#### Preparation:

When stirring take care not to introduce air in the fluid, which may result in bubbling on the cured membrane.

#### Application:

Apply with brush in one or two coats. Second coat is applied within 6-24 hours.

#### CONSUMPTION

Minimum total consumption: 0.1-0.2 kg/m<sup>2</sup>.

#### CLEANING

Clean tools and equipment first with paper towels and then using SOLVENT-01. Brushes will not be re-usable.

## PU-FINISH MATTE

### PACKAGING

1 lt, 4 lt and 20 lt.

### SHELF LIFE

Can be kept for 12 months minimum in the original unopened pails in dry places and at temperatures of 5-25 °C. Once opened, use as soon as possible.

### SAFETY INFORMATION

Contains volatile flammable solvents. Apply in well-ventilated, no smoking areas, away from naked flames. In closed spaces use ventilators and carbon active masks. Keep in mind that solvents are heavier than air so they creep on the floor. The MSDS (Material Safety Data Sheet) is available on request.

### TECHNICAL SPECIFICATIONS

#### In liquid form (before application):

PROPERTY	UNITS	METHOD	SPECIFICATION
Viscosity (Brookfield)	cP	ASTM D2196-86, @ 25 °C	20-40
Specific weight	gr/cm <sup>3</sup>	ASTM D1475 / DIN 53217 / ISO 2811, @ 20 °C	0.9-0.95
Tack free time, @ 77 °F (25 °C) & 55% RH	hours	-	3-4
Recoat time	hours	-	6-24

#### The cured membrane:

PROPERTY	UNITS	METHOD	SPECIFICATION
Service temperature	°C	-	-40 to 80
Max. temperature short time (shock)	°C	-	200
Hardness	Shore D	ASTM D2240 / DIN 53505 / ISO R868	> 60
Tensile strength at break @ 23 °C	Kg/cm <sup>2</sup> (N/mm <sup>2</sup> )	ASTM D412 / EN-ISO-527-3	550 (55)
Percent elongation @ 23 °C	%	ASTM D412 / EN-ISO-527-3	> 50
Water vapor transmission	gr/m <sup>2</sup> .hr	ASTM E96 (Water Method)	0.8
Thermal resistance (100 days @ 80 °C)	-	EOTA TR011	passed
Hydrolysis (Potassium Hydroxide 8%, 10 days @ 50 °C)	-	-	no significant elastomeric property change


Certified quality, environmental and occupational health & safety management systems:  
ISO 9001/14001 & OHSAS 18001.



## PU-FINISH MATTE

Hydrolysis (Sodium Hypochlorite 5%, 10 days)	-	-	no significant elastomeric property change
Water absorption	-	-	< 1.0%

NONE OF OUR PUBLISHED INSTRUCTIONS AND SPECIFICATIONS, IN WRITING OR OTHERWISE, ARE BINDING EITHER IN GENERAL OR WITH RESPECT TO ANY THIRD PARTY RIGHTS, OR DO THEY RELIEVE INTERESTED PARTIES OF THEIR DUTY TO SUBJECT THE PRODUCT TO AN ADEQUATE EXAMINATION OF ITS SUITABILITY. IN NO EVENT WILL ALCHIMICA S.A. BE RESPONSIBLE FOR DAMAGES OF ANY NATURE, WHATSOEVER, RESULTING FROM THE USE OF OR RELIANCE UPON INFORMATION OR THE PRODUCT TO WHICH INFORMATION REFERS.

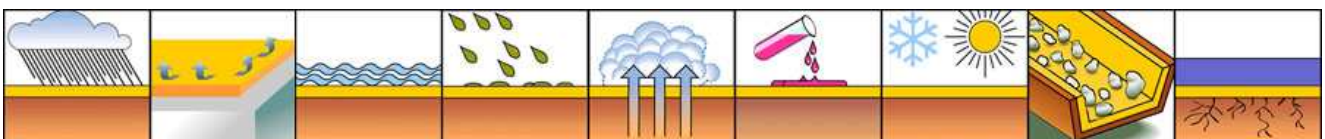

Certified quality, environmental and occupational health & safety management systems:  
ISO 9001/14001 & OHSAS 18001.

